



Acuros[®] CQD[®] 1280 USB3 SWIR Camera

Acuros[®] CQD[®] cameras are the highest pixel resolution SWIR cameras sold commercially, enabling users to see features with the finest details. Our novel CQD sensors deliver full visible-to-SWIR band response, achieving lower costs per megapixel compared to InGaAs SWIR cameras. The Acuros CQD 1280 SWIR camera is designed with an integrated, multi-purpose 1280x1024 TEC Cooled CQD sensor, resulting in low noise and highly stable performance. Acuros cameras have up to a 10db higher SNR than competitive 5 μ m pixel InGaAs cameras.

Specifications:

Electro-Optical Specifications:

Sensor	Acuros [®] CQD [®] sensor
Temperature stabilization	Single-stage thermo-electric cooler
Sensor array format	1280 x 1024
Resolution	1.31 megapixels
Spectral band	400 nm - 1700 nm
Array size	19.2mm x 15.4 mm, 24.6 mm diagonal
Pixel pitch	15 μ m x 15 μ m
Max frame rate at full resolution	88 fps (8, 10, 12, 14 bit)
Pixel operability	99.9% typical, 99.75% min
Bit depth	8, 10, 12, 14 bit selectable
Integration type	Snapshot global shutter
Trigger	External TTL
Integration time	10 μ sec to 4 sec
Dynamic range	70 dB typical
Windowing & windowing frame rate	Array centered. Scales inversely to window size
Laser beam fringeless operation	No (See Acuros Laser Series Cameras)
Binning arrays	2 x 2, 4 x 4
Non-uniformity correction	2-point non-uniformity correction
Temporal dark noise	65e ⁻ typical (high gain)
Quantum efficiency	See typical QE curve.

Features:

- HD resolution
- TEC cooling
- Low noise
- Fast frame rate
- Visible-SWIR
- USB3 Vision
- High value

Applications:

- Machine vision
- Silicon inspection
- Automotive
- Fill-level
- Surveillance
- Hyperspectral
- Chemical sensors
- Agricultural
- Medical imaging
- Thermography



SWIR[®]

VISION SYSTEMS

High Definition. SWIR Vision.

Specifications:

Environmental & power specifications, typical performance

Operating case temperature	-20 °C to +55 °C
Power consumption	6.5 - 12 W depending on TEC settings
Power supply voltage	6-16 VDC
Regulatory compliance	CE mark

Mechanical specifications

Dimensions excluding lens	6.1 x 6.1 x 9.7 cm (C-Mount)
Weight excluding lens	508 grams with C-mount adaptor, 594g (F-mount)
Lens mounts	C-, F-Mount, M42 (C-Mount flange-back distance)
Power connector	Hirose 12-pin, HR10A-10R-12PB (71)
Trigger connector	BNC

Software and user interface

Software development kit	Windows GUI and Pleora eBUS SDK (<i>Linux, Windows, MacOS</i>)
GenICam compliance	Yes
Interface	USB3 Vision

Export compliance

US export designation	EAR-99. No license required for lawful export
-----------------------	---

Ordering

Part numbers	1280: Acuros-1280-USB3-001
--------------	----------------------------




C-mount, F-mount, and M-42 Lens Mounts




USB3 Vision Interface

Acuros CQD SWIR camera images

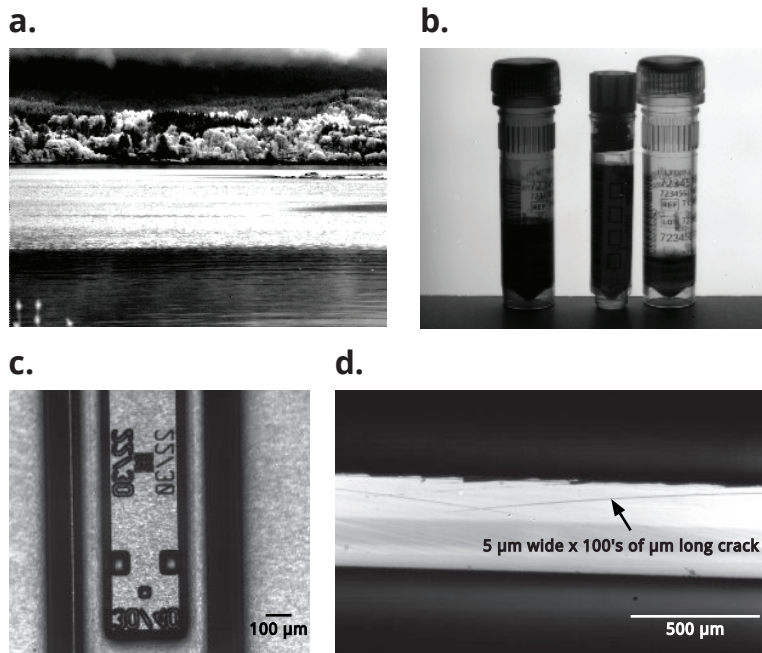

Typical QE Performance

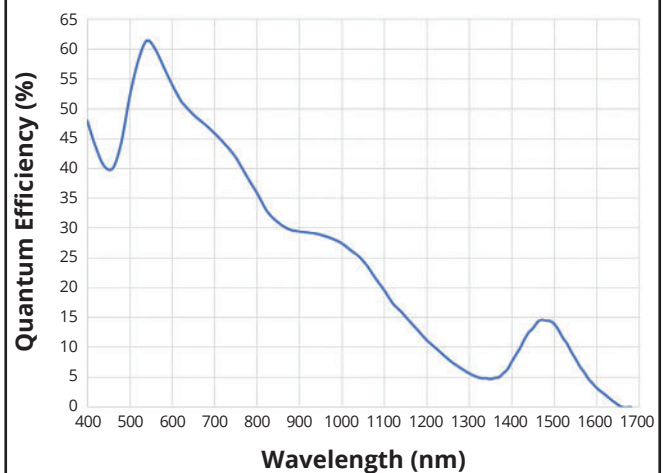

- a. Acuros 640: imaging through maritime rain event
- b. Acuros 640: imaging through pharmaceutical vial labels
- c. Acuros 1280: alignment mark in bonded wafers
- d. Acuros 1920: mag image of semiconductor chip edge





SWIR[®]

VISION SYSTEMS

High Definition. SWIR Vision.

Mechanical Drawings C Mount

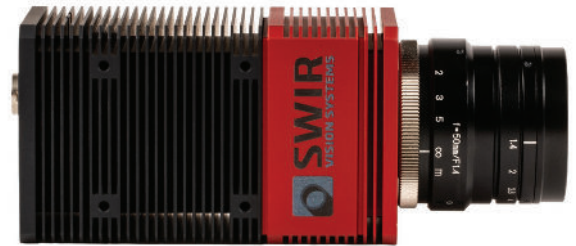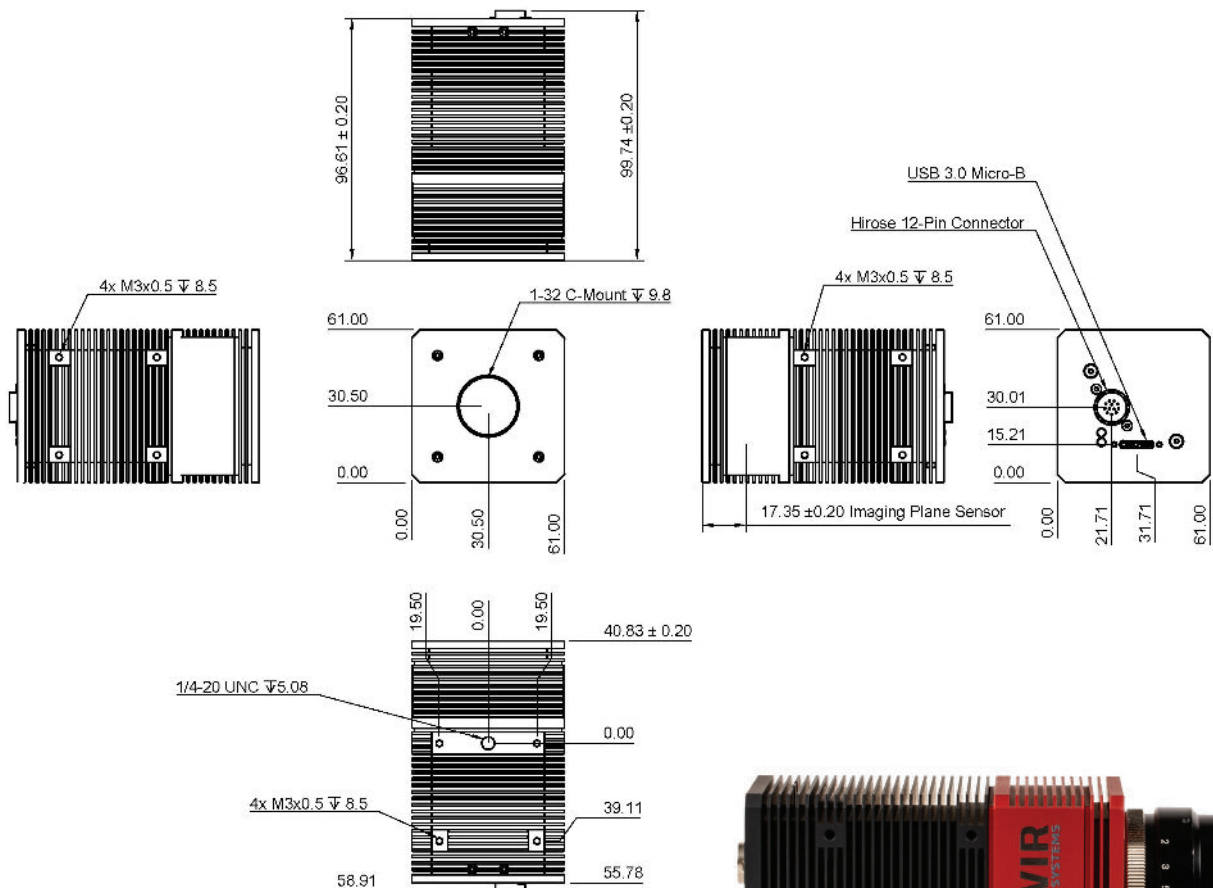

Contact Us:

For technical, pricing, and sales information, or to learn more about Acuros cameras or CQD sensor technology, please contact us at:

sales@swirvisionsystems.com

+1 919.248.0032



GEN*i*CAM

GIG
VISION



Acuros-1280-USB3-001

www.swirvisionsystems.com





SWIR[®]

VISION SYSTEMS

High Definition. SWIR Vision.

Mechanical Drawings M42 Short Mount

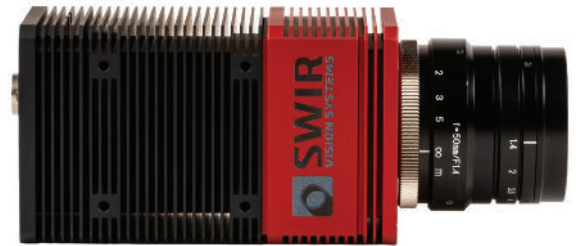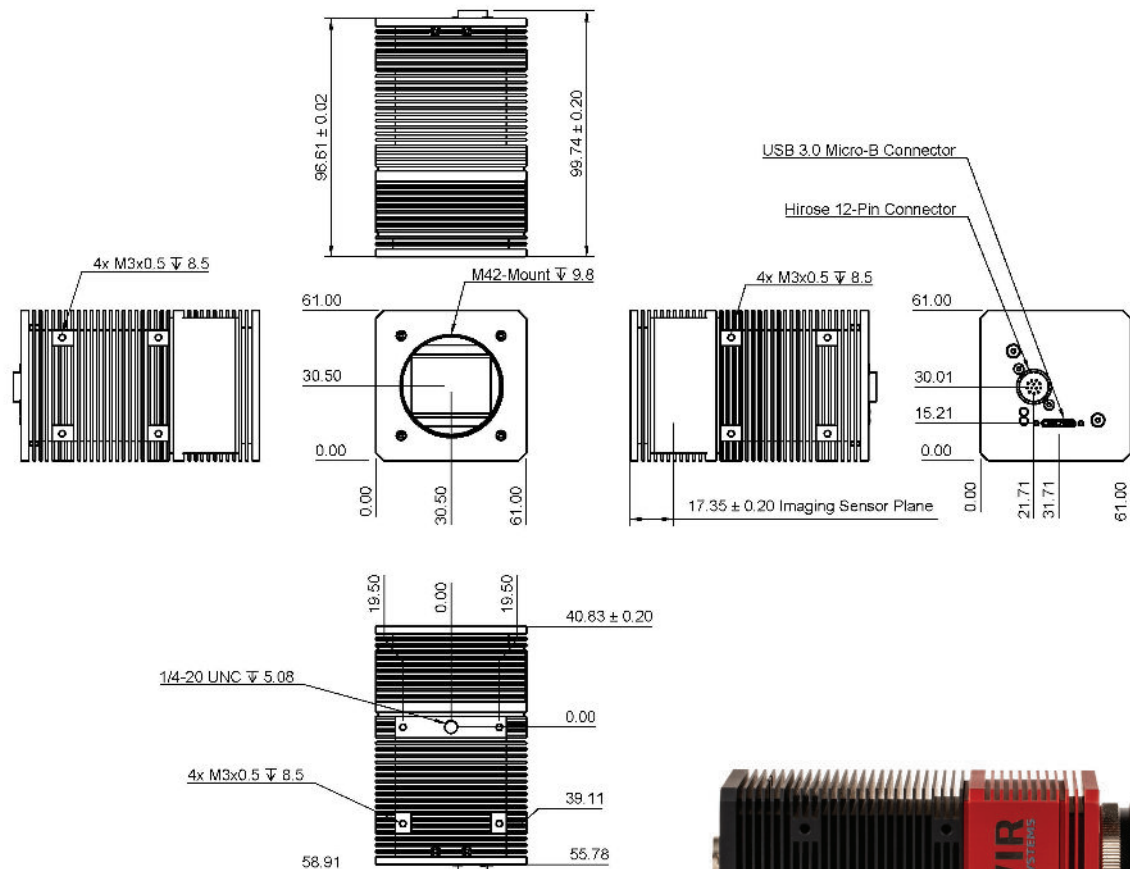

Contact Us:

For technical, pricing, and sales information, or to learn more about Acuros cameras or CQD sensor technology, please contact us at:

sales@swirvisionsystems.com

+1 919.248.0032



GEN<i>i>CAM

GIG
VISION

CE

Acuros-1280-USB3-001

www.swirvisionsystems.com